


A new line of outdoor ready, high performance air conditioners from McLean is now available as a standard product offering. This rugged family of products has been developed specifically to provide the telecommunications and outdoor process control industry with the highest reliability in the market under any environmental condition.



### MCLEAN CLOSED LOOP COOLING

McLean air conditioners are designed and tested to maintain a UL 50 rated separation of the external ambient airflow from the sealed cabinet interior. This protects the electronic controls and equipment from shutdown caused by heat, humidity, dust and other contaminants.

T15-0116-GXXX, 60Hz Capacity Curves

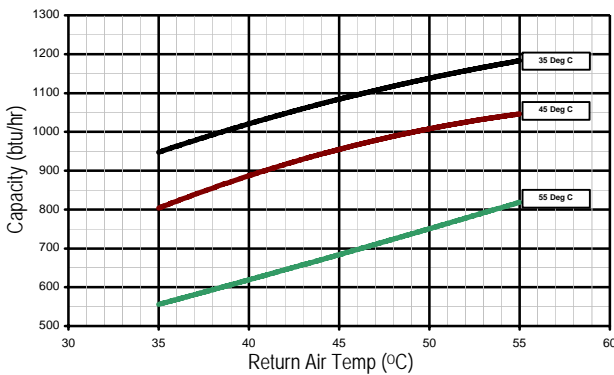

### FEATURES:

- Stock models are equipped with head pressure control for low ambient operation, compressor heater, coated condenser coil, malfunction switch, thermostat, and heater package.
- Stock models agency approvals included: CE, UL, TYPE12, TYPE3R and TYPE4.
- The filter is easily accessible.
- Compact footprint to minimize real estate and maximize capacity.
- Standard models provided as surface or fully recessed mount. Partial mount models, available upon request.
- Designed to achieve seal capable of TYPE 4 and/or GR-487 wind driven rain when properly installed on an equally rated enclosure.
- Broad operating range -40°F to 131°F.
- 100% functionally tested.
- All units use a CFC-free or environmentally safe refrigerant that is universally accepted.

### OPTIONS:

- Self contained enclosure heaters
- Malfunction alarm contact switch
- Tamper resistant hardware
- TYPE 4X
- Additional options available, contact factory

### REFRIGERANT: R134A

**AGENCY APPROVAL:** CE, UL file SA6453. UL50 TYPE12, TYPE3R & TYPE4 rating maintained when properly installed on an equally rated enclosure.




TYPE12 TYPE3R TYPE4

T15									
900 BTU/Hr. (264 Watts) <span style="float: right;">H x W x D: 15.75" (400) x 7.50" (191) x 6.30" (160)</span>									
Model	Voltage	Phase	Amps @ Max Conditions	Phase	BTU/Hr @ Max Conditions	50Hz Max Amb Temp °F/°C	60Hz Max Amb Temp °F/°C	Shipping Weight Lbs/Kgs	
T15-0116-G150	STOCK	100/115	50/60	3.8/3.6	1	800/800	125/52	131/55	27/12
T15-0116-GXXX		100/115	50/60	3.8/3.6	1	800/800	125/52	131/55	27/12
T15-0126-G150	STOCK	220/230	50/60	1.4/1.5	1	800/900	125/52	131/55	27/12
T15-0126-GXXX		220/230	50/60	1.4/1.5	1	800/900	125/52	131/55	27/12

-XXX will be replaced with a three-digit number designating all desired options. Consult the factory for specific model numbers.

### CUT-OUT NOTES

1. Dash line represents air conditioner.
2. Cut-out dimensions for standard product only.

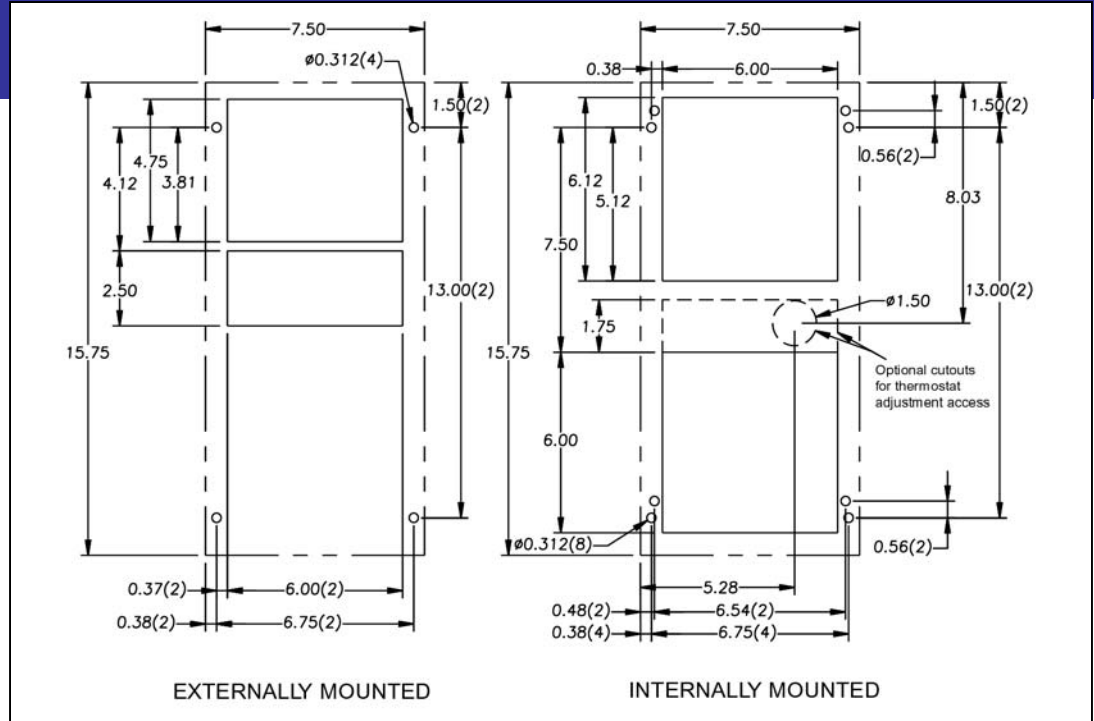

### DESIGN NOTES

1. Gasket kit for mounting to enclosure is included.

2. Service cord terminated with appropriate plug cap.

