
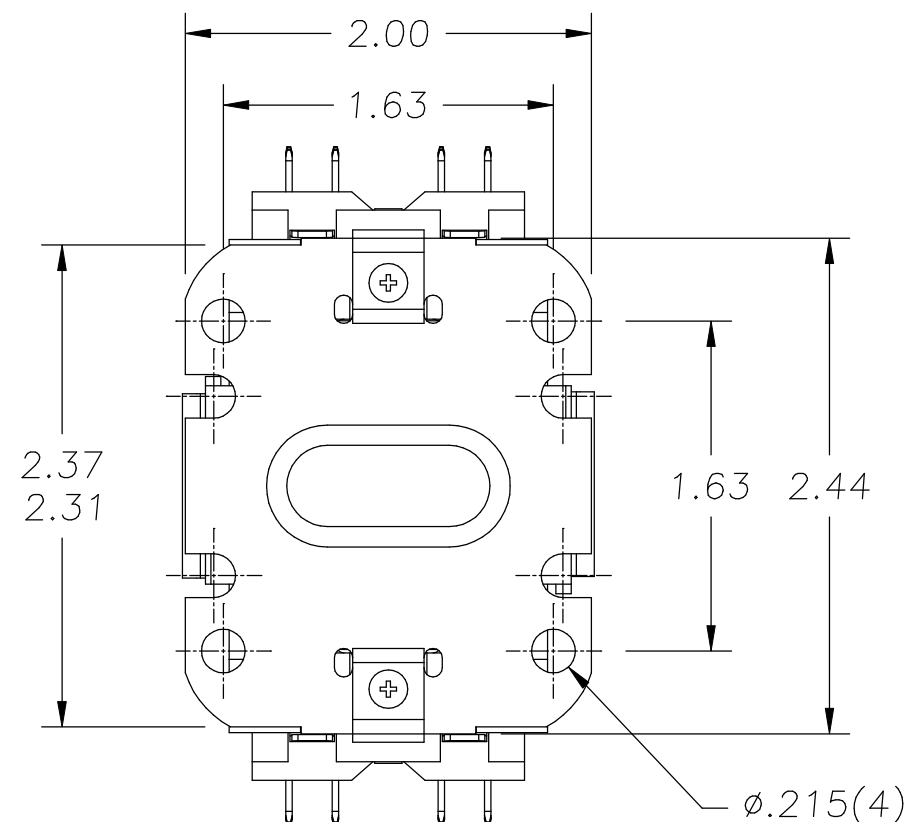
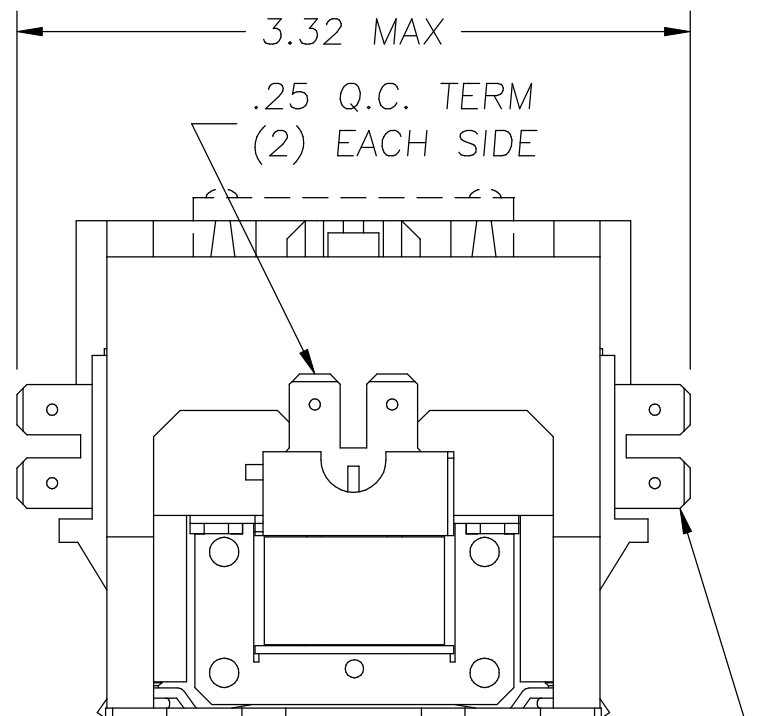


ARC COVER
(OPTIONAL)

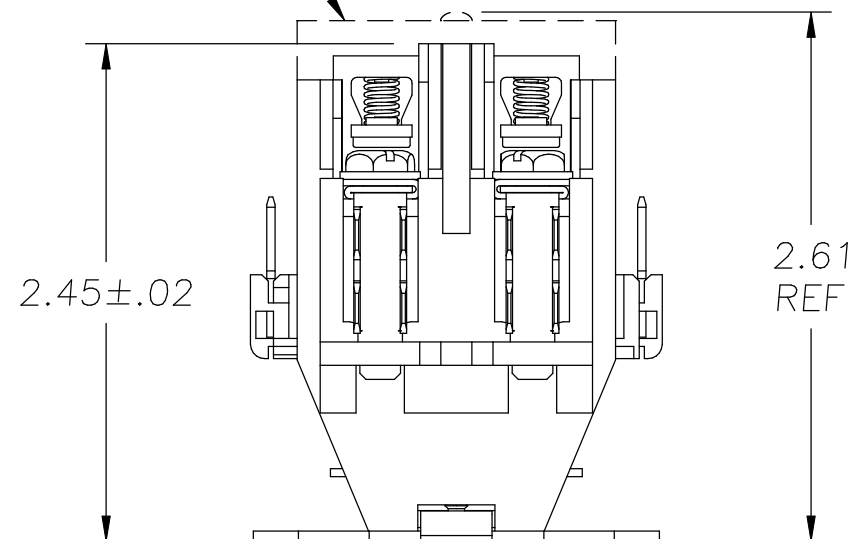

REV		DESCRIPTION	DATE	BY	CHK
1		REVISED & REDRAWN	9-22-93 DCO A0082	JR	RAP
2		WAS FURNAS# 45EA20AJ190T	1-3-02 ECO 94839	RS	MK
3		ADDED WILSPEC, WAS 'A' SIZE	11.10.09 ECO 97101	JAT	DN DN

APPROVED SOURCE	D/ M	PART NUMBER	
		VENDOR	McLEAN
PRODUCTS UNLIMITED	M	3100-20Q6999	10-1005-44
WILSPEC TECHNOLOGIES	M	CT-2XQ02AA	10-1005-44

D=DISTRIBUTER M=MANUFACTURER

SPECIFICATIONS:

CONTACT RATINGS:

2 POLE
FLA: 30 INDUCTIVE
240V LRA: 150
480V LRA: 125
NON-INDUCTIVE AMPS: 40

24VAC COIL RATINGS:

MAXIMUM SEALED VA: 7
VOLTS PICK-UP: 18
DROP OUTS VOLTS RANGE: 6-15
VOLT RATING: 24VAC-50HZ/60HZ

OPERATING TEMPERATURE RANGE: -40°F TO 149°F

PROD. UNLIM. UL FILE# E75492

CSA FILE# LR49598

CE/SEMKO CERTIFIED TO EN60947-4-1:1991

WILSPEC UL FILE# E310181

ATTENTION:


THIS DRAWING AND THE
INFORMATION IT CONTAINS ARE
THE EXCLUSIVE PROPERTY OF
McLEAN. ANY UNAUTHORIZED
USE, DISCLOSURE, OR
REPRODUCTION WITHOUT THE
EXPRESS WRITTEN CONSENT OF
McLEAN IS PROHIBITED.

UNLESS OTHERWISE
SPECIFIED DIMENSIONS ARE
IN INCHES. TOLERANCES:
DECIMALS .XXX +/- .005
DECIMALS .XX +/- .015
DECIMALS .X +/- .03
ANGULAR +/-1 DEGREE

MATERIAL:

BULK:
SPEC.:

DRAWN	DATE
JR	9-22-93
CHECKED	DATE
RAP	10-5-93
PROJECT ENG.	DATE
APPROVED	DATE
SCALE: NONE	
SIZE B	SHEET: 1 OF 1



McLean
COOLING TECHNOLOGY

CONTACTOR, 30AMP, 2-POLE,
24VAC COIL

DWG. NO. 10-1005-44